

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

(12) DEMANDE DE BREVET CANADIEN  
CANADIAN PATENT APPLICATION

(13) A1

(86) Date de dépôt PCT/PCT Filing Date: 2000/08/30

(87) Date publication PCT/PCT Publication Date: 2001/03/22

(85) Entrée phase nationale/National Entry: 2002/02/27

(86) N° demande PCT/PCT Application No.: EP 2000/008427

(87) N° publication PCT/PCT Publication No.: 2001/019599

(30) Priorités/Priorities: 1999/09/11 (199 43 442.5) DE;  
1999/10/13 (199 49 318.9) DE

(51) Cl.Int.<sup>7</sup>/Int.Cl.<sup>7</sup> B29C 70/46, B29C 70/20, B29C 70/18,  
B29C 70/10, C08J 5/24


(71) Demandeur/Applicant:  
MENZOLIT FIBRON GMBH, DE

(72) Inventeurs/Inventors:  
EHNERT, GERD, DE;  
BIENIEK, KLAUS, DE

(74) Agent: ROBIC

(54) Titre : PREIMPREGNE RENFORCE PAR DES FIBRES DE CARBONE POUR COMPOSANTS RENFORCES MULTI-AXIAUX

(54) Title: CARBON-FIBRE REINFORCED SMC FOR MULTI-AXIALLY REINFORCED COMPONENTS

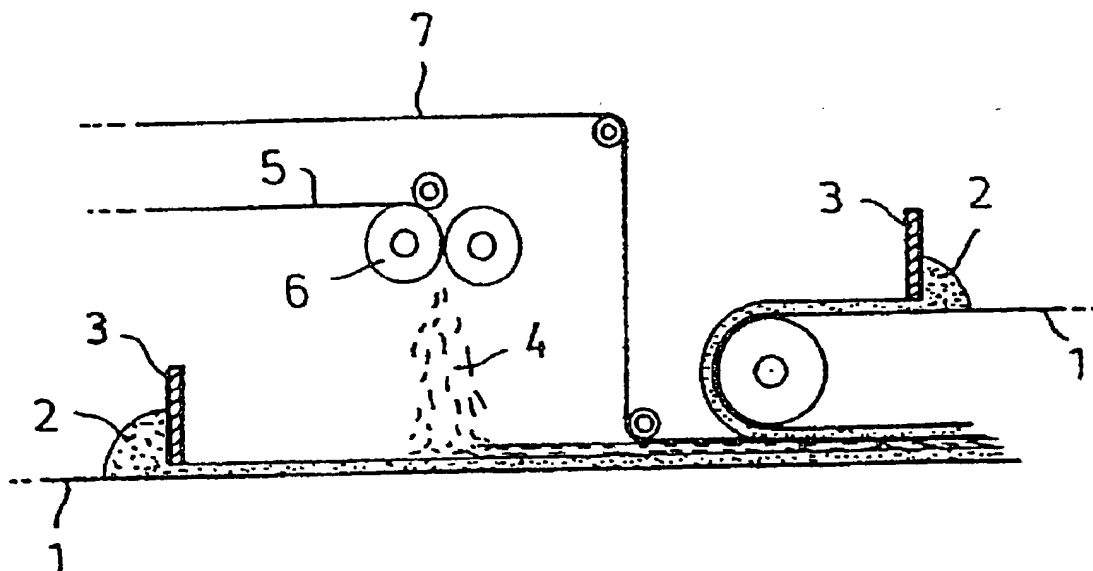

(57) Abrégé/Abstract:

The invention relates to an SMC (sheet moulding compound) for producing fibre-reinforced duroplastic components. Said SMC consists of a resin matrix (2) which is fibre-reinforced with unidirectional fibres (UD-fibres) (7) that are arranged in axial alignment and preferably with additional cut fibres (random fibres) (4) that are arranged in a non-aligned manner in the resin matrix. According to the invention, in order to achieve extremely high rigidity in a multi-axial direction with a low surface weight, several layers of SMC are arranged in the component, each layer containing UD-fibres (7) with a different axial alignment from one another.

## Carbon-fibre reinforced SMC for multi-axially reinforced components

5 The invention relates to an SMC for producing fibre-reinforced thermosetting components, a corresponding production process and a component produced from this SMC.

10 SMC stands for "Sheet Moulding Compound" and is a resin mat according to DIN 16913. In general, SMC refers to a flowable resin mat based on unsaturated polyester resin or vinyl ester resin and random fibre distribution in the plane of the mat. The reinforcing fibres customarily used are glass fibres. A typical SMC formulation  
15 consists of about 30% of polymer, about 30% of filler and about 30% of glass fibres, the remainder being composed of additives, such as, for example, colouring pigments, hardeners, dispersing auxiliaries, fillers and similar materials. SMC is generally produced as follows:  
20 the resin matrix is applied to two carrier films. These carrier films are drawn through an SMC machine and in the process transport the resin matrix, onto which the reinforcing fibres are sprinkled or laid. Once the reinforcing fibres have been deposited, the two films  
25 are pressed together to produce a kind of sandwich. This sandwich is transported through an impregnating section, which uses pushing and rocking movements to ensure that the fibres are uniformly wetted with the resin matrix. At the end of the machine, it is wound onto reels. Of  
30 crucial importance is a ripening process, which may be initiated by chemical and/or physical means. After this ripening process, the SMC can be further processed. After stripping off of the carrier foils, the SMC is customarily processed or pressed in heated steel moulds  
35 to form shaped parts.

The advantage of SMC is the high flowability, which has the effect that only 30 to 50% of the pressing mould has to be covered. The strength and stiffness can be varied in a wide range, depending on the reinforcing-fibre content.

As an alternative, it is known to place a woven fabric in the resin matrix for reinforcement. The disadvantage of this is that, although the strength is substantially increased, there is hardly any flowability. The pressing mould must be completely covered, which requires exact cutting to size, resulting in a lot of waste.

Furthermore, SMC with a glass-fibre reinforcement comprising both cut fibres (random fibres) and unidirectional fibres (UD fibres) is known. The UD fibres produce increased strength and stiffness properties in an axial direction and the random fibres determine the transverse strength. This SMC is preferably employed only for support-type components, such as, for example, bumper supports. It is not possible to produce sheet-like components because of the high tendency of the components to become distorted.

The object on which the invention is based is to develop an SMC for producing fibre-reinforced thermosetting components according to the preamble such that a high strength and stiffness in a multi-axial direction is achieved in sheet-like thin-walled components. The basis for this is an SMC with an asymmetrical fibre structure, comprising a random fibre side and a UD fibre side.

According to the invention, this object is achieved in that several layers of SMC containing UD fibres with a different axial alignment from one another are arranged

in the component. Since the UD fibres govern the strength and stiffness properties, these properties are not only provided in an axial direction but in different directions. Owing to the high strength and stiffness, it is possible to produce lightweight components or ones with a thin wall structure.

In order to be able to produce a multi-layer SMC structure with desired component wall thicknesses of about 1.2 mm and large SMC as cut dimensions, the SMC weight per unit area must be less than 1000 g/m<sup>2</sup>.

Until now, it has not been possible either to produce such low SMC weights per unit area industrially, or effectively from the point of view of strength and stiffness. The development of such an SMC has become interesting only with a UD carbon-fibre reinforcement and the resulting strength and stiffness properties for a multi-axial reinforcement in the component.

In comparison with the customary process techniques for the production of components from fibre composites with carbon fibres (resin transfer moulding, prepreg processing by the pressing or autoclave process), the SMC on which the invention is based has the following advantages:

- Simple as cut geometries, since despite UD fibre reinforcement the SMC is flowable
- No SMC clippings which have to be disposed of or recycled
- No trimming of the shaped parts, therefore no waste

- Short cycle times of the component production, therefore suitable for mass production.

5 A combination of random fibres formed of glass or carbon fibres with UD carbon fibres is preferred for the asymmetrically reinforced SMC which has been developed.

10 The SMC on which the invention is based covers 60 - 95% of the pressing mould. In order to produce the flowability of the UD carbon fibres in the UD direction, the continuous UD fibres are cut to a finite length. The finite UD fibre lengths may be between 25 mm and 650 mm. The ends of the finite UD fibres are offset from one another in order to avoid weak points in the SMC.

15 In a preferred embodiment, the UD fibre lengths are carbon fibre tows, for example produced by the "heavy tow" process. It is advantageous to use carbon fibres greater than 49 K for this purpose. Alternatively, broad-strip carbon fibre tows produced by the "heavy tow" process in widths of 10 mm to 500 mm can be used.

20 To check the UD fibre directions in the finished shaped part by X-ray inspection, individual glass fibre yarns are introduced into the matrix in the direction of the UD fibres as contrast fibres.

25 To improve the fibre wetting, the flowability and to compensate for shrinkage, a different resin matrix is advantageously used for the random fibres and the UD fibres.

30 It is advantageous to introduce conductive additives into the resin matrix, in order to improve the electrical conductivity to such a degree that an

electrostatic (ESTA) coating is possible without an additional conductive primer on the component.

5 The surface resistance should be between  $10$  and  $10^6 \Omega$  at  $5$  V and the volume resistance be less than  $10^5 \Omega/\text{cm}$ .

10 A process according to the invention for producing a fibre-reinforced SMC having the above-mentioned properties is distinguished in that SMC mats with random fibres and a single layer of UD fibres are produced and in that a plurality of such SMC mats is arranged, prior to further processing to form the shaped part, with multi-axial alignment of the UD fibres by building up into a stack. This has the great advantage that an existing installation for producing an SMC comprising random fibres and UD fibres does not have to be altered. 15 The multi-axial alignment is brought about by the building up of individual SMC mats into a stack, the SMC mats being stacked so as to be rotated relative to one another. 20

In a preferred embodiment, all the UD fibre layers used are aligned in the  $0^\circ$  direction and any desired number of fibre layers are used. 25

In an alternative preferred embodiment, at least four UD fibre layers are arranged in the following alignment:

$0^\circ, 90^\circ, 90^\circ, 0^\circ$  or  $0^\circ, 90^\circ, 0^\circ, 90^\circ$ .

30

The angles indicate that the next UD fibre layer below is arranged so as to be rotated by this angle relative to the first layer.

This means that the first layer is aligned at  $0^\circ$  and the second layer at  $90^\circ$  relative to the first layer.

5 In an alternative preferred embodiment, at least six UD fibre layers are arranged. In this case, the UD fibre layers expediently have the following alignment:

$0^\circ, 90^\circ; +45^\circ, -45^\circ, 90^\circ, 0^\circ.$

10 In an alternative embodiment, eight UD fibre layers are arranged with the following alignment:

$0^\circ, 90^\circ; +45^\circ, -45^\circ, +45^\circ, -45^\circ, 90^\circ, 0^\circ.$

15 For greater wall thicknesses, the material structure can be laid from multiples of 4 or 6 or 8 layers in the specified order one above the other.

20 A preferred embodiment of the process provides that the SMC mats (with one UD fibre layer) are cut into strips and wound onto spools, that the strips for the component production are cut to length and arranged in any desired position and the individual blank layers are built up into a stack in any desired angular position relative to  
25 one another on a rotary table. This has the advantage that even geometrically difficult blank shapes do not produce any waste.

30 As the final operation, the stack is either placed in the tool (press) for producing the component and the component is pressed or else, as an intermediate stage, is preshaped by prepressing for the purpose of securing, the press for preshaping being an inverse form of the mould for producing the component.



Preferably, the strips are wound onto spools with a core diameter of greater than or equal to 200 mm and an outside diameter of greater than or equal to 500 mm.

5       The SMC and processing technology according to the invention is versatile. It is preferably used to produce fibre-reinforced components, in particular for the automotive industry.

10       Components can be produced for a wide variety of applications, depending on the resin matrix. Interior and exterior parts joined together result in high strengths and stiffnesses in body elements, for example.

15       When using a non-shrinking resin matrix, it is possible to produce exterior parts of motor vehicles with a "class A" surface which, because of their electrical conductivity, can be electrostatically coated like sheet-metal parts.

20       Further features of the invention will become apparent from the figures which are described below and in which:

25       Fig. 1       shows, schematically, an installation for producing SMC with one UD fibre layer,

      Fig. 2       shows, schematically, an apparatus for producing the blank layers and the multi-axial SMC,

30       Fig. 3       shows, schematically, the production of the blank layers and the building up into a stack on a rotary table,

35       Fig. 4       shows the pressing to form a shaped part,

Fig. 5 shows, by way of example, a built up stack of individual UD fibre layers,

Fig. 6 shows a finished shaped part with a schematic arrangement of the original UD fibre layers, and

Fig. 7 shows the multi-axial alignment of the UD fibre layers.

Fig. 1 shows a machine or installation for producing SMC with a single UD-fibre layer. A resin paste or resin matrix 2 is applied to a film 1 using a doctor blade 3. Random fibres 4 are then sprinkled on. These random fibres 4 are glass fibres or carbon fibres, which are supplied as continuous fibres 5 to a cutting device 6 and are cut by the latter into small pieces of about 6 - 50 mm in length. Unidirectional UD fibres 7 are then laid on in the direction of travel of the web. These UD fibres 7 are preferably carbon fibres. Finally, a second film 1 is again coated with a resin matrix 2 using a doctor blade 3 and is laid onto the first film, resulting in a kind of sandwich. The subsequent impregnation in a chamber between honeycombs or honeycombs and binders, which may be arranged in a heating chamber, is not shown. This SMC thus produced is, according to the invention, cut on-line or off-line into strips of about 4 - 20 cm in width and wound onto reels.

Fig. 2 shows, schematically, the subsequent procedure. The reels 8 just mentioned are arranged offset in succession. Only two reels 8 are depicted here, by way of example. A film stripper 9 is arranged beside each of the reels 8. To produce the multi-axial SMC, the SMC is

cut to length by a cutting tool 10 and displaced, resulting in a blank layer 11 of virtually any shape without clipping. The reference numeral 12 denotes the individual strips after cutting and before displacement. The displacement takes place on a conveying device 13. The individual layers 11 cut to size are then either built up into a stack with different axial alignment of the UD fibres on a rotary table 14 or else fixed directly by prepressing. The press 15 for preshaping is advantageously an inverse form of the mould for producing the shaped part.

Fig. 3 shows, schematically, the production of the blank layers 11 and the building up into a stack on a rotary table 14. The individual reels 8 are cut, according to requirements, and displaced to form a blank layer 11 and then stacked on a rotary table 14. This procedure does not produce any waste or clippings.

Fig. 4 shows the pressing to form a shaped part 16. A stack of built-up blank layers has been preshaped in a preshaping press 17. This preshaping press 17 is then placed together with the preshaped part into the press 18, the preshaping press is then withdrawn and the shaped part 16 is pressed.

Fig. 5 shows, by way of example, a built-up stack 19 of individual blank layers 11. In this example, the stack 19 consists of six layers with an orientation of the UD fibre layers of  $0^\circ$ ,  $90^\circ$ ,  $+45^\circ$ ,  $-45^\circ$ ,  $90^\circ$ ,  $0^\circ$ .

Fig. 6 shows a finished component (shaped part) 16 with a schematic arrangement of the individual UD fibre layers. The building up of the individual cut to size layers 11 can be clearly seen.

Fig. 7 shows the multi-axial alignment of the UD fibre layers at  $0^\circ$ ,  $90^\circ$ ,  $+45^\circ$ ,  $-45^\circ$ ,  $90^\circ$ ,  $0^\circ$ .

## Claims

1. SMC (Sheet Moulding Compound) for producing fibre-reinforced thermosetting components consisting of a resin matrix (2) which is fibre-reinforced with unidirectional fibres (UD fibres) (7) arranged in axial alignment and advantageously with additional cut fibres (random fibres) (4) arranged in non-aligned manner in the resin matrix (2), characterised in that several layers of SMC containing UD fibres (7) with a different axial alignment from one another are arranged in the component.
2. SMC according to Claim 1, characterised in that the random fibres (4) are glass fibres and the UD fibres (7) are carbon fibres or vice versa.
3. SMC according to Claim 1, characterised in that the UD fibres (7) and the random fibres (4) are carbon fibres.
4. SMC according to Claim 1, characterised in that the UD fibres (7) are carbon fibres and no random fibres (4) are used.
5. SMC according to Claim 1, characterised in that the UD fibres (7) are "heavy tow" carbon fibre tows or "heavy tow" broad-strip carbon fibre tows.
6. SMC according to one of Claims 1 to 5, characterised in that the UD fibres (7) are shortened by incisions in the finished SMC to produce flowability in the fibre direction.

7. SMC according to Claim 6, characterised in that the cutting width of the tool for cutting the UD fibre layers is between 2 mm and 15 mm.
- 5 8. SMC according to one of the preceding claims, characterised in that a different resin matrix (2) is used for the random fibres (4) and the UD fibres (7).
- 10 9. SMC according to one of the preceding claims, characterised in that, to check the UD fibre directions, individual UD glass fibres are introduced into the matrix (2) in the direction of the UD carbon fibres (7) as contrast fibres.
- 15 10. SMC according to one of the preceding claims, characterised in that the SMC weight per unit area is less than 1000 gram/m<sup>2</sup>.
- 20 11. SMC according to one of the preceding claims, characterised in that the resin matrix (2) contains electrically conductive additives.
- 25 12. Process for producing a fibre-reinforced SMC according to one of Claims 1 to 11, characterised
- in that SMC mats with a single layer of UD fibres (7) are produced
- and
- 30 - in that a plurality of SMC mats is arranged, prior to further processing to form the component (16), with multi-axial alignment of the UD fibres (7) by building up into a stack (19).
- 35

13

13. Process according to Claim 12, characterised in that all the UD fibre layers (7) used are aligned in the  $0^\circ$  direction and any desired number of fibre layers (7) are used.

5

14. Process according to Claim 12 or 13, characterised in that at least four UD fibre layers (7) are arranged.

10

15. Process according to Claim 14, characterised in that the four UD fibre layers (7) have the following alignment

$0^\circ, 90^\circ, 90^\circ, 0^\circ$  or  $0^\circ, 90^\circ, 0^\circ, 90^\circ$ .

15

16. Process according to Claim 12 or 13, characterised in that at least six UD fibre layers (7) are arranged.

20

17. Process according to Claim 16, characterised in that the six UD fibre layers (7) have the following alignment

$0^\circ, 90^\circ; +45^\circ, -45^\circ, 90^\circ, 0^\circ$ .

25

18. Process according to Claim 12 or 13, characterised in that eight UD fibre layers (7) are arranged.

30

19. Process according to Claim 18, characterised in that the eight UD fibre layers (7) have the following alignment

$0^\circ, 90^\circ; +45^\circ, -45^\circ, +45^\circ, -45^\circ, 90^\circ, 0^\circ$ .

20. Process according to one of Claims 12 to 19,  
characterised

5 - in that the SMC mats are cut into strips (12) and  
wound onto spools or reels (8),

- in that the strips (12) are cut to length and  
arranged in rectangular blank layers (11) and

10 - in that the individual blank layers (11) are  
built up into a stack (19) on a rotary table (14).

21. Process according to Claim 20, characterised in  
that the stack (19) is placed into the mould  
15 (press) (18) for producing the component (16) or  
else is preshaped by prepressing for the purpose of  
securing.

22. Process according to Claim 21, characterised in  
20 that the press for preshaping is an inverse form of  
the mould for producing the component (16).

23. Process according to one of the preceding claims,  
characterised in that the strips (12) are wound  
25 onto spools with a core diameter of greater than  
200 mm and an outside diameter of greater than  
500 mm.

24. Process according to one of the preceding claims,  
30 characterised in that the SMC is flowable and the  
blank size is always smaller than the laid out  
component surface.



25. Component made of fibre-reinforced thermosets, characterised in that this component is produced from an SMC according to one of Claims 1 to 24.
- 5 26. Component according to Claim 25 for use as an exterior part of a motor vehicle.

Application number/ Numéro de demande : EP00-008427

Documents of poor quality scanned  
(request original documents in File Prep. Section on the 10<sup>th</sup> floor)

Documents de piètre qualité numérisés  
(Pour obtenir les documents originaux, veuillez vous adresser à la Section de préparation  
des dossiers, située au 10<sup>e</sup> étage)

---

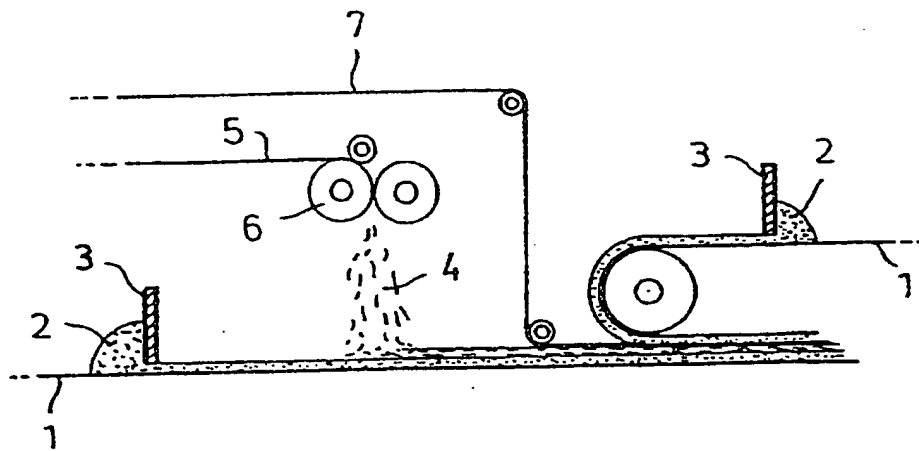


FIG.1

-2/7-

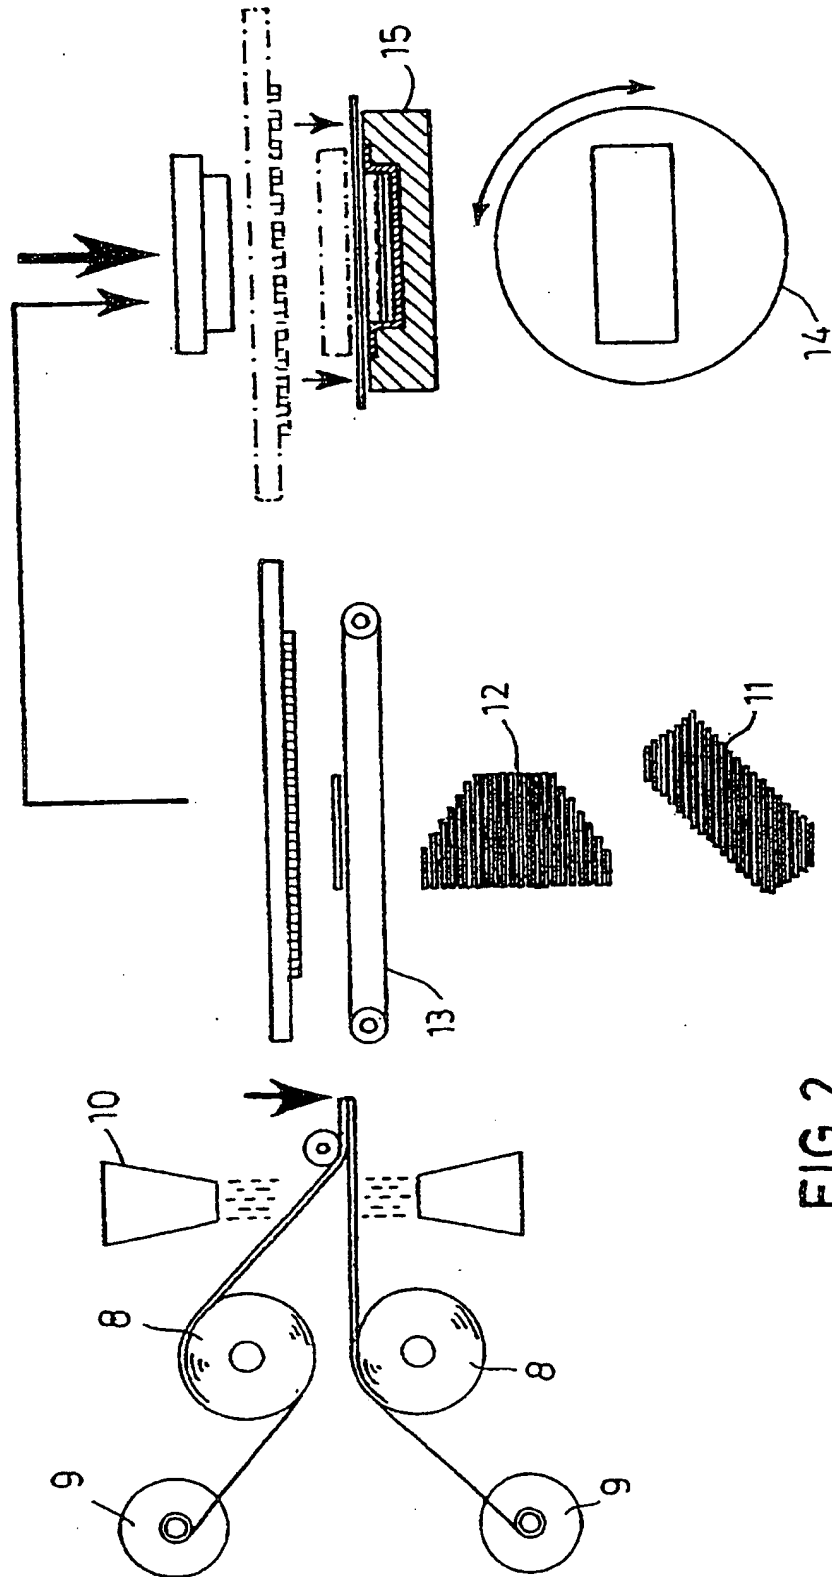


FIG.2

- 3 / 7 -

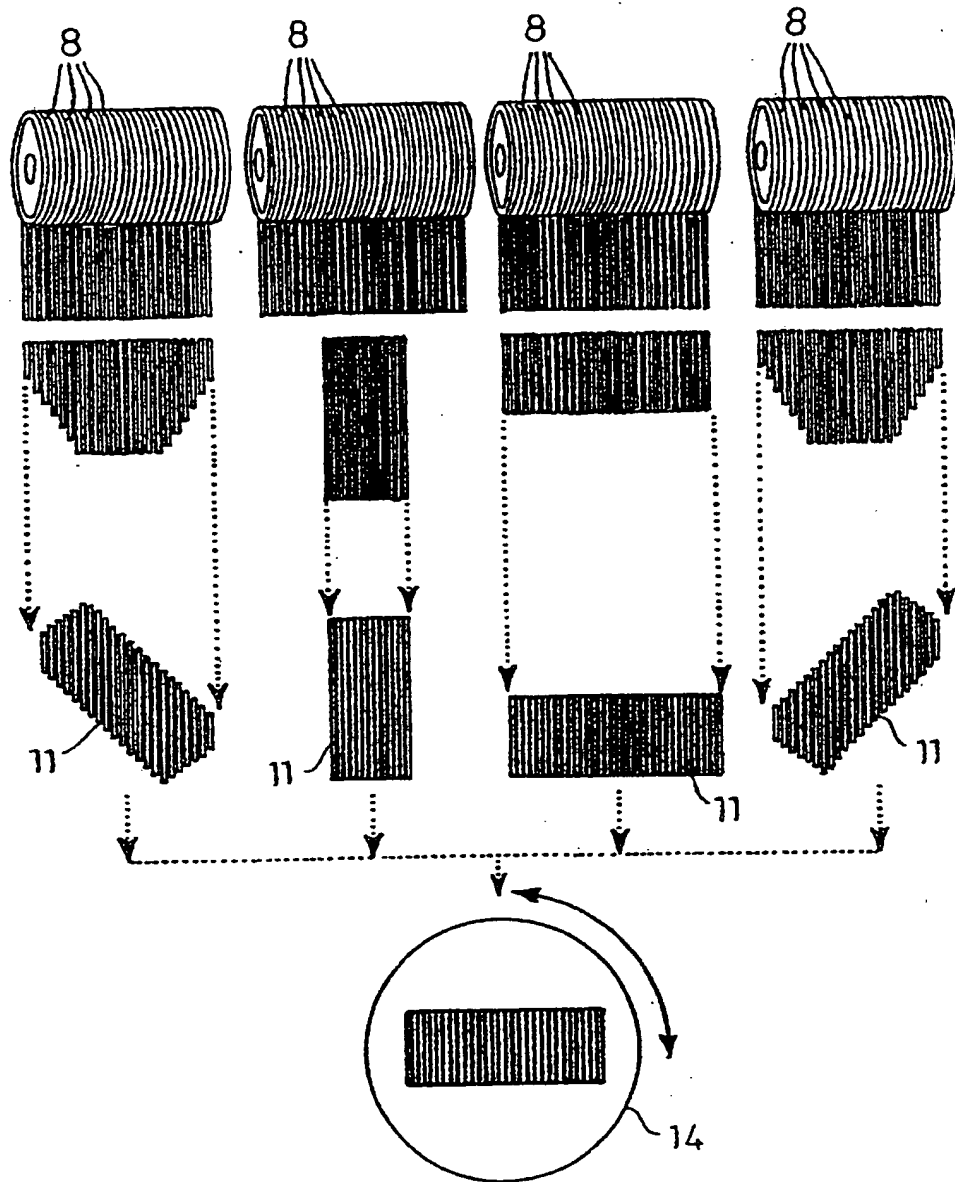


FIG.3

- 4 / 7 -

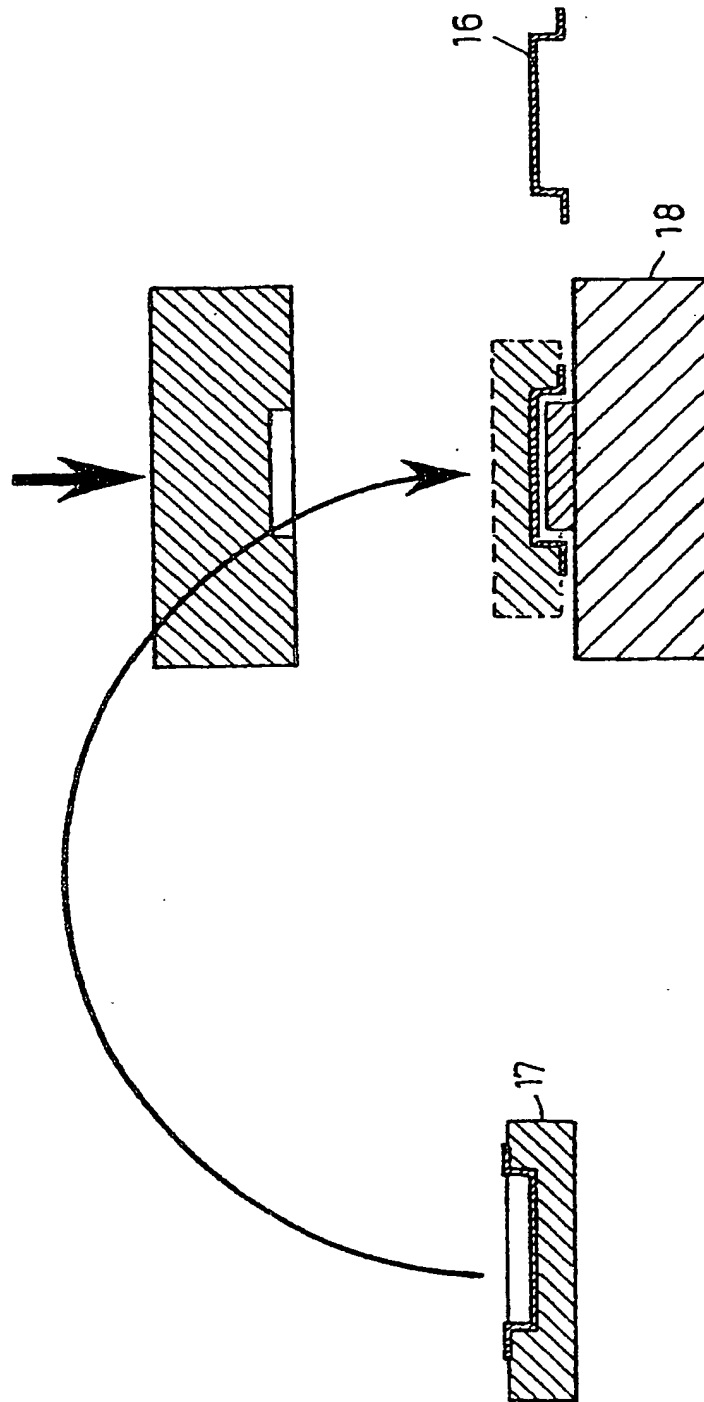


FIG. 4

- 5 / 7 -

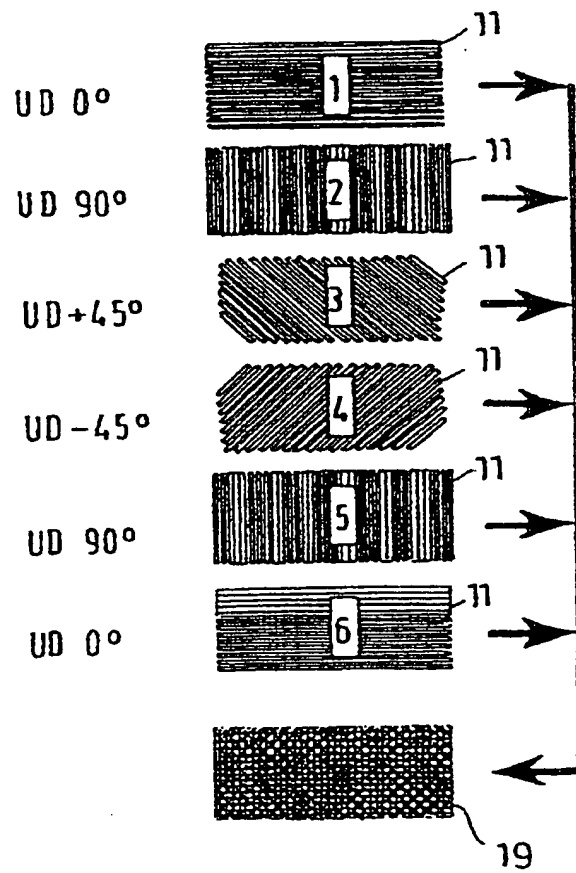


FIG. 5

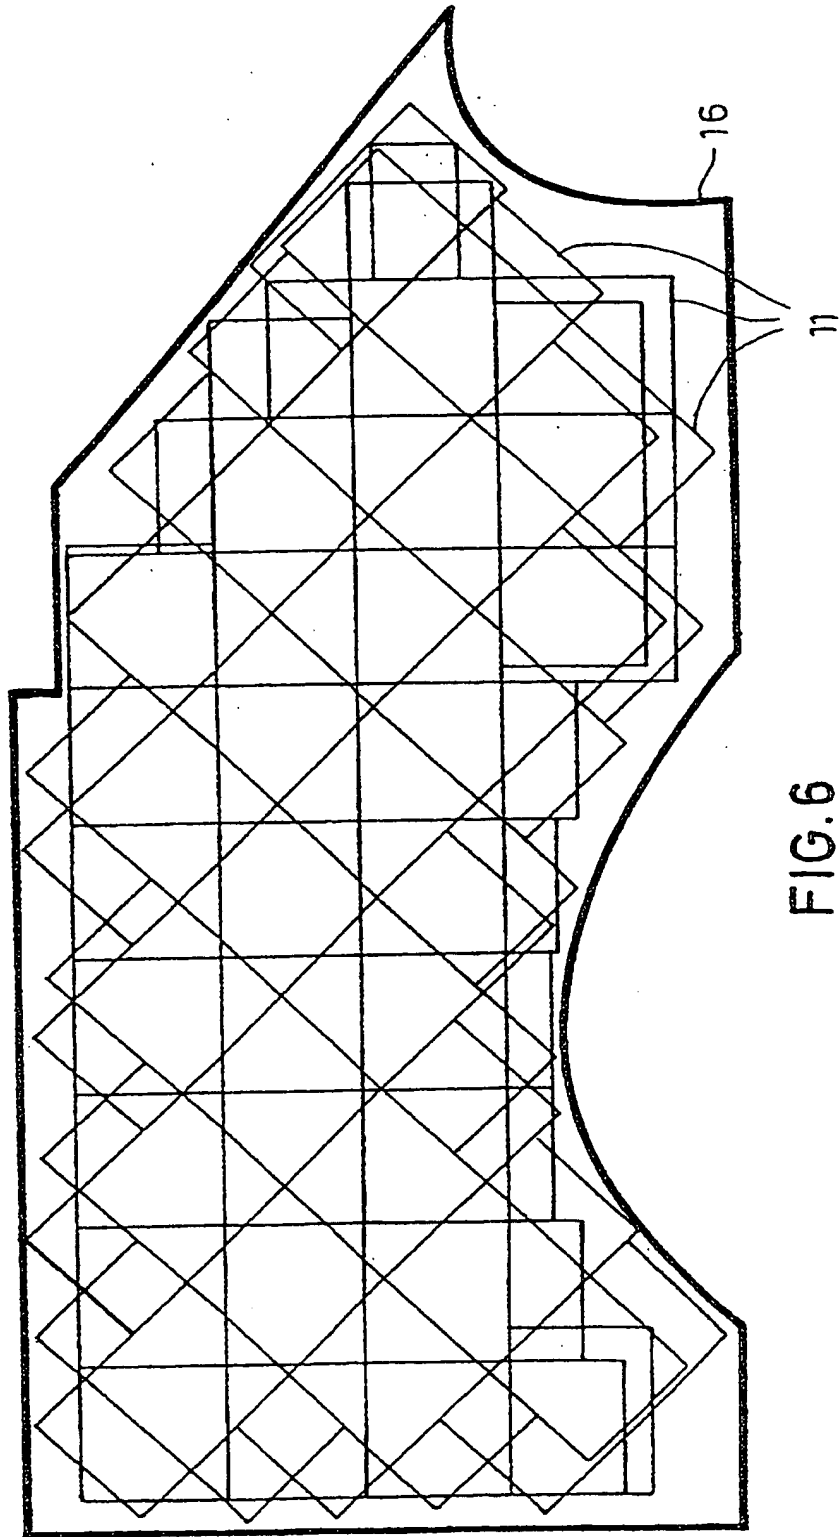


FIG. 6



-7/7-


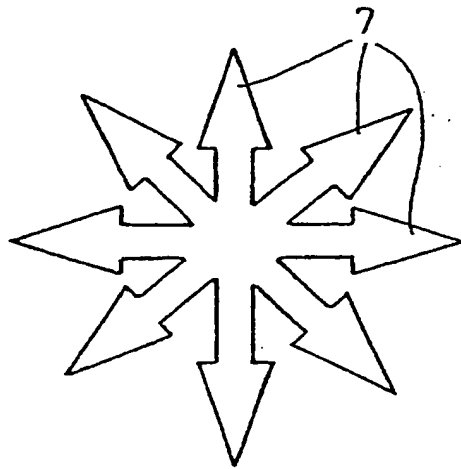


FIG .7

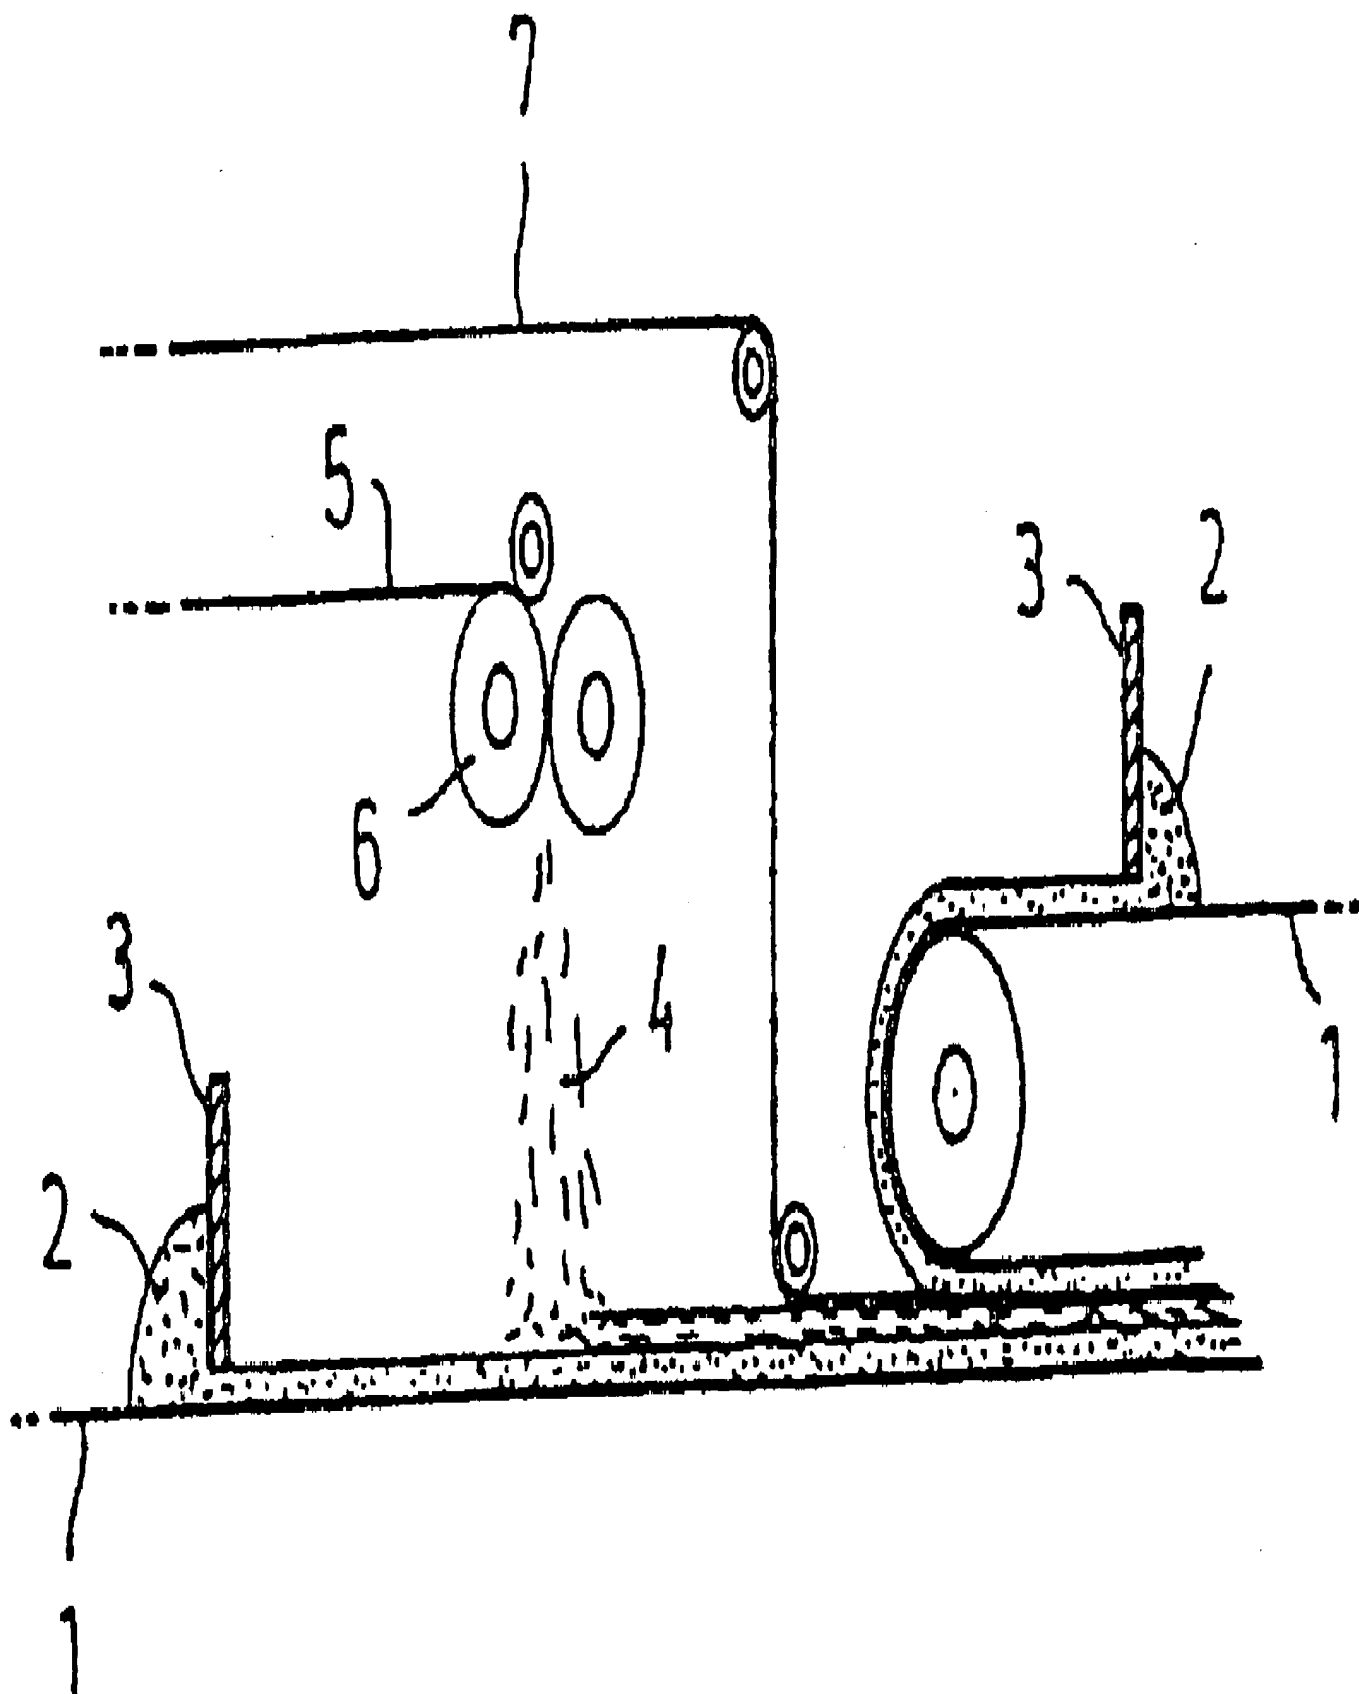

(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES  
PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG(19) Weltorganisation für geistiges Eigentum  
Internationales Büro(43) Internationales Veröffentlichungsdatum  
22. März 2001 (22.03.2001)

PCT


(10) Internationale Veröffentlichungsnummer  
WO 01/19599 A1

- (51) Internationale Patentklassifikation<sup>7</sup>: B29C 70/46, (71) Anmelder (für alle Bestimmungsstaaten mit Ausnahme von  
C08J 5/24, B29C 70/10, 70/18, 70/20 US): MENZOLIT FIBRON GMBH [DE/DE]; Hermann-  
Beutenmüller-Strasse 11 - 13, D-75015 Bretten (DE).
- (21) Internationales Aktenzeichen: PCT/EP00/08427 (72) Erfinder; und  
(75) Erfinder/Anmelder (nur für US): EHNERT, Gerd  
[DE/DE]; Königsbergerstrasse 19, D-76694 Forst (DE).  
BIENIEK, Klaus [DE/DE]; Talstrasse 5, D-75438 Knit-  
tingen-Hohenklingen (DE).
- (22) Internationales Anmeldedatum:  
30. August 2000 (30.08.2000)
- (25) Einreichungssprache: Deutsch (74) Anwälte: SCHERZBERG, Andreas usw.; Dynamit No-  
bel Aktiengesellschaft, Patentabteilung, D-53839 Troisdorf  
(DE).
- (26) Veröffentlichungssprache: Deutsch
- (30) Angaben zur Priorität:  
199 43 442.5 11. September 1999 (11.09.1999) DE (81) Bestimmungsstaaten (national): AE, AL, AM, AT, AU,  
199 49 318.9 13. Oktober 1999 (13.10.1999) DE AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE,  
DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID,

[Fortsetzung auf der nächsten Seite]

(54) Title: CARBON-FIBRE REINFORCED SMC FOR MULTI-AXIALLY REINFORCED COMPONENTS

(54) Bezeichnung: KOHLENSTOFFFASERVERSTÄRKTES SMC FÜR MULTIAXIAL VERSTÄRKTE BAUTEILE

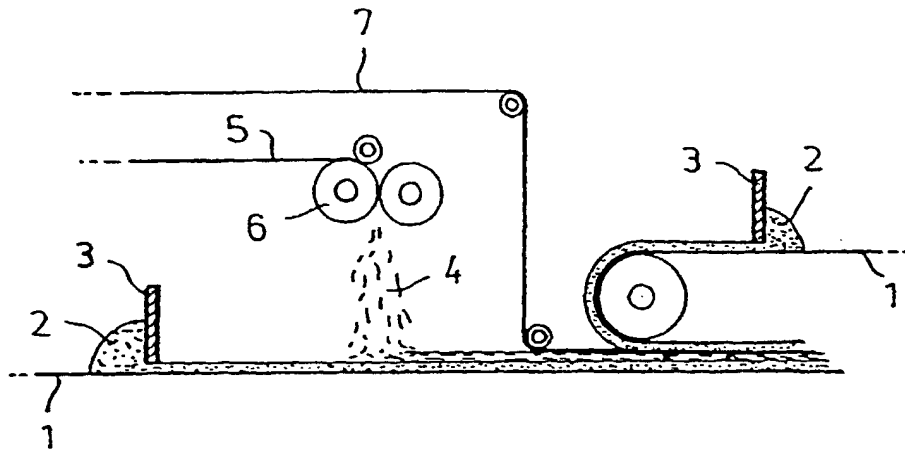

(57) Abstract: The invention relates to an SMC (sheet moulding compound) for producing fibre-reinforced duroplastic components. Said SMC consists of a resin matrix (2) which is fibre-reinforced with unidirectional fibres (UD-fibres) (7) that are arranged in axial alignment and preferably with additional cut fibres (random fibres) (4) that are arranged in a non-aligned manner in the resin matrix. According to the invention, in order to achieve extremely high rigidity in a multi-axial direction with a low surface weight, several layers of SMC are arranged in the component, each layer containing UD-fibres (7) with a different axial alignment from one another.

(57) Zusammenfassung: Die Erfindung betrifft ein SMC (Sheet Moulding Compound) zur Herstellung faserverstärkter duroplastischer Bauteile bestehend aus einer Harzmatrix (2) mit einer Faserverstärkung mit unidirektionalen Fasern (UD-Fasern) (7), die in einer axialen Ausrichtung angeordnet sind, und vorteilhafterweise zusätzlich mit geschnittenen Fasern (Wirrfasern) (4), die ungeordnet in der Harzmatrix angeordnet sind. Damit bei niedrigem Flächengewicht eine extrem hohe Festigkeit in multiaxialer Richtung erreicht ist, wird vorgeschlagen, dass mehrere Lagen SMC mit UD-Fasern (7) mit voneinander verschiedener axialen Ausrichtung im Bauteil angeordnet sind.

WO 01/19599 A1